

**HAVE**

**A**

**NICE**

**WORKING**

**DAY**



ZUPÒ

UNICO

---

## ZUPÒ UNICO

---



## SPECIFICATION

---

POWER	15 W COB
BEAM ANGLE	15°/24°/38°
LUMINOUS FLUX	1200 lm
COLOR TEMP.	3000 K
CRI	> 95
UGR	< 16
VOLTAGE	220-240V
POWER FACTOR	> 0.9
DIMMING	N/A
IP GRADE	IP20
COLOR	White and black
INSTALLATION	Track Mounted
DIMENSION (MM)	180 X $\Phi$ 60

---



ZUPÒ

GRANDE

---

## ZUPÒ GRANDE

---




## SPECIFICATION

---

POWER	25 W COB
BEAM ANGLE	15°/24°/38°
LUMINOUS FLUX	2000 lm
COLOR TEMP.	3000 K
CRI	> 95
UGR	<16
VOLTAGE	220-240V
POWER FACTOR	>0.9
DIMMING	N/A
IP GRADE	IP20
COLOR	White and black
INSTALLATION	Track Mounted
DIMENSION (MM)	240 X $\Phi$ 80

---

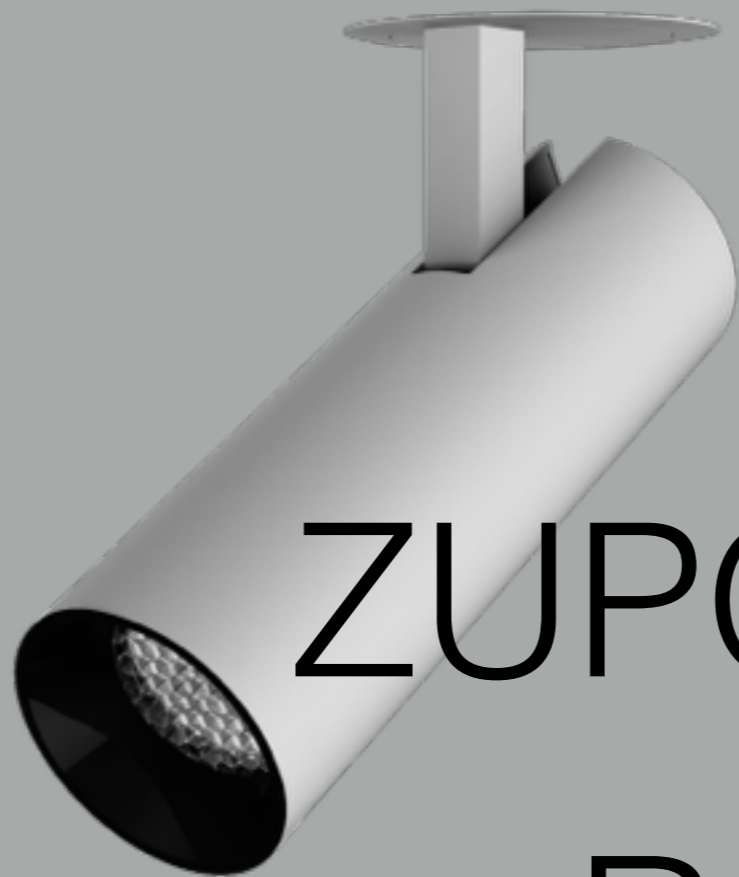

ZUPÒ

R

---

## ZUPÒ R

---



## SPECIFICATION

---

POWER	15 W COB
BEAM ANGLE	15°/24°/38°
LUMINOUS FLUX	1200 lm
COLOR TEMP.	3000 K
CRI	> 95
UGR	<16
VOLTAGE	220-240V
POWER FACTOR	>0.9
DIMMING	N/A
IP GRADE	IP20
COLOR	White and black
INSTALLATION	Recessed Mounted
DIMENSION (MM)	180 X $\Phi$ 60

---

ZUPÒ  
DOPPIO





---

## ZUPÒ DOPPIO

---



## SPECIFICATION

---

POWER	25 W COB
BEAM ANGLE	15°/24°/38°
LUMINOUS FLUX	2000 lm
COLOR TEMP.	3000 K
CRI	> 95
UGR	<16
VOLTAGE	220-240V
POWER FACTOR	>0.9
DIMMING	N/A
IP GRADE	IP20
COLOR	White and black
INSTALLATION	Recessed / Track
DIMENSION (MM)	320 X 220 X $\Phi$ 60

---



ZUPÒ

STAND

---

## ZUPÒ STAND

---



## SPECIFICATION

---

POWER	25 W COB
BEAM ANGLE	15°/24°/38°
LUMINOUS FLUX	2000 lm
COLOR TEMP.	3000 K
CRI	> 95
UGR	<16
VOLTAGE	220-240V
POWER FACTOR	>0.9
DIMMING	N/A
IP GRADE	IP20
COLOR	White and black
INSTALLATION	Stand
DIMENSION (MM)	1200 X 300 X $\Phi$ 60

---



ZUPÒ

MURCO

---

## ZUPÒ MURO (Wall Lamp)

---



## SPECIFICATION

---

POWER	15 W COB
BEAM ANGLE	15°/24°/38°
LUMINOUS FLUX	1200 lm
COLOR TEMP.	3000 K
CRI	> 95
UGR	<16
VOLTAGE	220-240V
POWER FACTOR	>0.9
DIMMING	N/A
IP GRADE	IP20
COLOR	White and black
INSTALLATION	Wall Mounted
DIMENSION (MM)	300 X $\Phi$ 60

---

---

## VICO

---



## SPECIFICATION

---

POWER	7 W COB
BEAM ANGLE	15°/24°/38°
LUMINOUS FLUX	550 lm
COLOR TEMP.	3000 K
CRI	> 95
UGR	<16
VOLTAGE	220-240V
POWER FACTOR	>0.9
DIMMING	N/A
IP GRADE	IP20
COLOR	Silver and black
INSTALLATION	Recessed
DIMENSION (MM)	106 X $\Phi$ 63

---



SENA

LINEAR

---

## SENA LINEAR

---



## SPECIFICATION

---

POWER	30 W
BEAM ANGLE (DOWN)	30° / 50°
BEAM ANGLE (UP)	130°
LUMINOUS FLUX	3300 lm
COLOR TEMP.	3000K / 4000K
CRI	> 80
SDCM	<3 Step
UGR	<16
VOLTAGE	220-240V
POWER FACTOR	>0.9
DIMMING	N/A / 1-10V
IP GRADE	IP20
COLOR	White and black
INSTALLATION	Pendant
DIMENSION (MM)	1287 X 40 X 80

---





ETNA



LINEAR

---

## ETNA LINEAR

---



## SPECIFICATION

---

POWER	30 W
BEAM ANGLE (DOWN)	60°
BEAM ANGLE (UP)	130°
LUMINOUS FLUX	3300 lm
COLOR TEMP.	3000K / 4000K
CRI	> 80
SDCM	<3 Step
UGR	<19
VOLTAGE	220-240V
POWER FACTOR	>0.9
DIMMING	N/A / 1-10V
IP GRADE	IP20
COLOR	White and black
INSTALLATION	Pendant
DIMENSION (MM)	1200 X 60 X 60

---