

INDUSTRIAL / Wall Mounted Light

# LED Wall Mounted Light

WHY-LB03 Series

A high-performance LED wall-mounted luminaire engineered for demanding outdoor and commercial environments. Combining luminous efficacy of up to 160LM/W, an IP65 protection rating, wide-voltage operation and a corrosion-resistant housing, it delivers stable, long-life, all-weather illumination.



18W

20W

## KEY FEATURES



### Reliable waterproof sealing

An integrated, UV-resistant silicone sealing ring maintains a dependable watertight seal over the long term.



### Versatile, all-scenario design

Multiple layers of protection make the luminaire suitable for corridors, car parks, outdoor walls and similar settings.



### Impact-resistant glass cover

A high-strength tempered glass cover offers excellent impact resistance for safe, durable outdoor service.



### Anti-glare optics

An opalescent reflector softens the output and reduces glare, providing comfortable, non-dazzling light at night.



### Quick, hassle-free installation


IP65-rated quick-connect terminals make installation fast and efficient, saving both time and labour cost.



### Maintenance-free design

The power supply and driver are mounted at the rear, so wiring and installation can be carried out without removing the front cover, simplifying maintenance.

## BEAM DISTRIBUTION

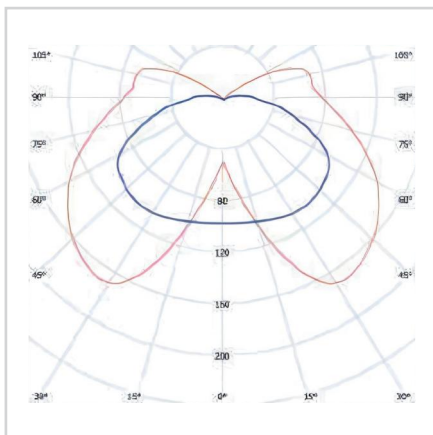


MODEL VARIANTS

Mode	Wattage	Luminous Efficacy	Size
WHY-LB03-18W	18W	150lm/W	320*210*180mm
WHY-LB03-20W	20W	160lm/W	320*210*180mm

TECHNICAL SPECIFICATIONS

CCT	3000K/4000K/6000K
CRI	CRI≥80
Input Voltage	AC100-240V
Housing Color	Grey
Housing Material	Aluminum, tempered glass
Operating Temperature	-25°C to +50°C
IP Level	IP65

DIMENSION (MM)

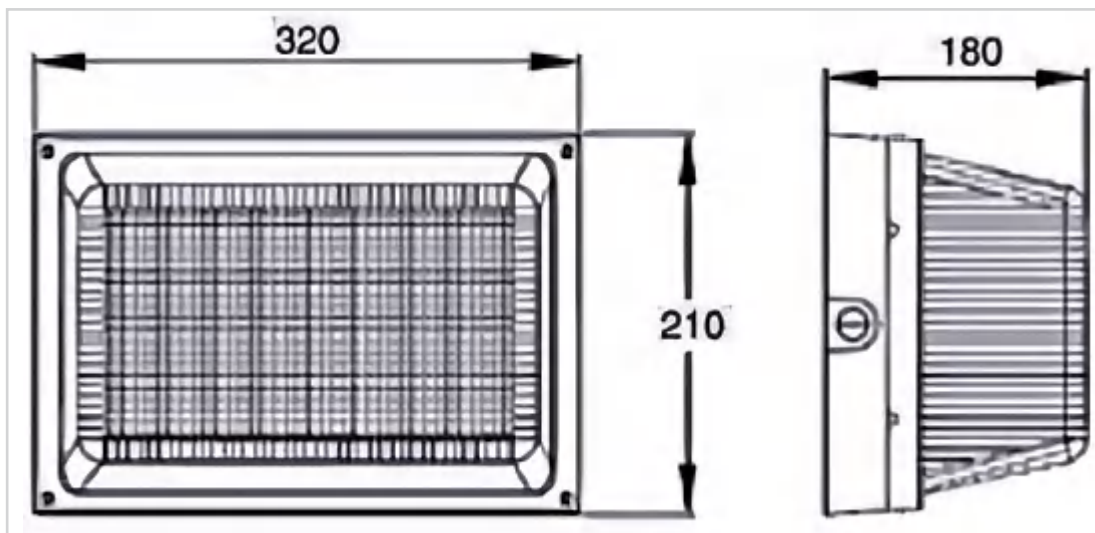

APPLICATION PLACES

- Garden
- Street
- Yard
- Factory
- Schools
- Hotels
- Resorts
- Parking lots
- Public parks etc